


WiLA™ R.O. Filtration System

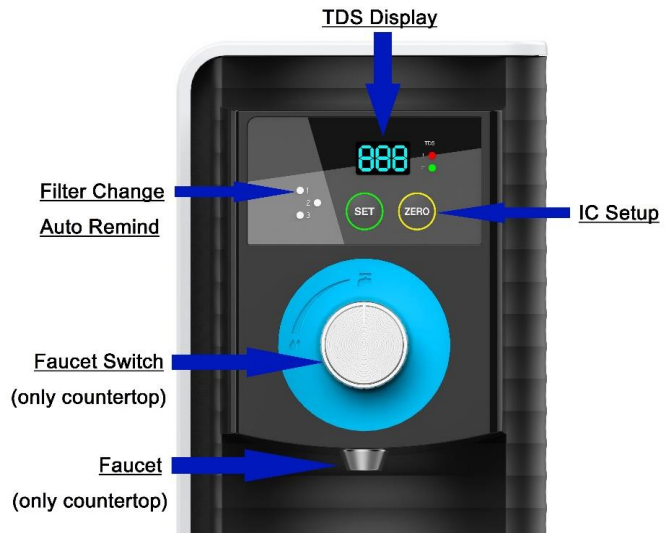

Model : **LSRO-301A**

(Counter Top Type)

Dimension : 390H x 410L x 150W mm

Electricity : 220V ~ 240Vx 50 ~ 60 Hz

Three Stage Filtration : **1st Stage - 5 micron, PP**

Sediment Reduction

2nd Stage - 5 micron, CTO Carbon Filter

Chemical, Chlorine, Odor and THMs Reduction

3th Stage - 0.0001 micron RO Membrane

Bacteria, Virus and Mineral Removal

RO Capacity : 50 GPD (with Booster Pump)

Max. Pressure : 80 psi

Max. Temperature : 45°C

Features - 24 Hours Water Quality Detect

- Auto Water Quality Remind

- Auto Notice Filter Replacing Time

- Easy to Set Up

No tools required



EASY TO OPERATE (easy change filter)

